# **NKFENCING**

NK Fencing Ltd (Head office) 40 Trailcock Road Carrickfergus Co. Antrim BT38 7NU t: +44 28 9335 1172


D08 ND00 t: +353 1 626 9000

**Dublin 8** 

e: mail@nkfencing.ie w: www.nkfencing.ie

6 Kylemore Business Park Kylemore Way

e: mail@nkfencing.com w: www.nkfencing.com

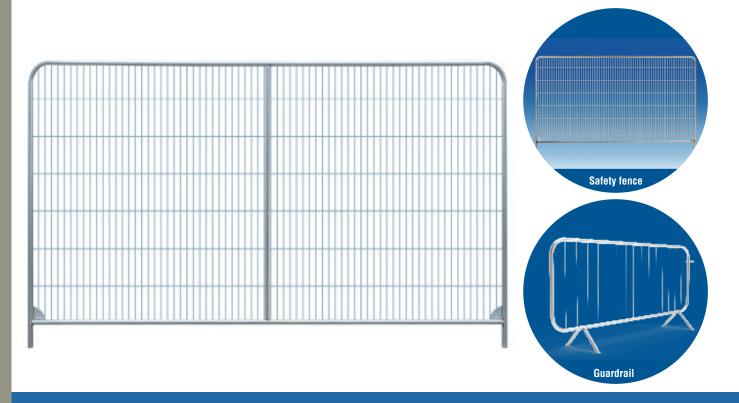

# NK SITESECURE PLUS

Main image shows SiteSecure Safety Plus Fence

# **GENERAL SPECIFICATION**

## SITESECURE SAFETY PLUS FENCE

SPECIFICATION: NK SiteSecure Safety Plus Fence, as Drawing NK/ SSEC/4, galvanised panel 2m high x 3.4m wide, comprising 38mm diameter tubular frame with radius top and reinforced bottom corners. Frame is reinforced with centre vertical strengthening bar. Panel is clad with 50mm x 261mm mesh, complete with rubber foot and coupler.

#### SITESECURE SAFETY FENCE

SPECIFICATION: NK SiteSecure Safety Fence, as Drawing NK/ SSEC/3, galvanised panel 2m high x 3.4m wide, comprising 38mm diameter tubular frame with radius top and reinforced bottom corners. Panel is clad with 50mm x 261mm mesh, complete with rubber foot and coupler.

#### SITESECURE GUARDRAIL

SPECIFICATION: NK SiteSecure Guardrail, as Drawing NK/SSEC/2, galvanised panel 1.1m high x 2.3m wide, comprising 38.1mm diameter tubular frame infilled with 15nr 12.6mm diameter vertical bars at 110mm centres (bars slotted to top and welded to bottom horizontals), complete with hook connectors and staggered legs for ease of stacking.

## NK SITESECURE HOARDING

SPECIFICATION: NK SiteSecure Hoarding Panel, as Drawing NK/ SSEC/1, galvanised panel 2m high x 2m wide, comprising 38mm diameter top and bottom tubular frame with horizontal channels infilled with cover from view corrugated sheet (0.7mm thick), complete with rubber foot and coupler.

\*All dimensions represent nominal values.

# **KEY FEATURES**

NK SiteSecure offers a range of products to cater for temporary fencing and access control requirements. Typically used at contruction sites or public entertainment venues.

Designed for efficient storage and transportation, rapid installation and through it's modular construction, provides customisable temporary fencing boundaries which match your environment.

Installation of all fencing is subject to site specific risk assessments and NK recommends due regard should be given to nearby aids to scaling or natural overhangs.

# STANDARD COLOUR RANGE

The colours shown are indicative colours. No guarantee can be given that the match is correct

BLACK RAL 9005 GREY RAL 7037 BLUE RAL 5010 WHITE RAL 9010 GREEN RAL 6005

R

RED RAL 3000 YELLOW RAL 1006

BROWN RAL 8019